



i3TOUCH v-Sense 70"

V7002 T10

i3 offers an exciting alternative to traditional interactive board solutions, our i3TOUCH collection of digital signage and accessories is an all in one solution. i3TOUCH displays feature V-Sense technology, which ensures extremely fast and accurate display interaction, perfect for use in schools and classrooms! The i3TOUCH LCD touch solution provides crystal clear, high-definition pictures. The touch technology operates at the touch of a finger or pen and the screen reacts instantly.



STANDARD

- Up to 10 touch points
- plug & play upwards of windows 7
- gestures recognition
- · V-sense touch technology: Finger, stylus or any other pen or finger shaped object.
- · extremely fast
- $\boldsymbol{\cdot}$ USB and HDMI front for easy access
- 4 mm Anti-Reflexion safety glass
- Built-in audio amplifier and speakers
- Professional panel for 24/7 useLED version, 50% energy-saving
- Full range of i3TOUCH displays
- Warranty: 2 years







The powerful and fast V-Sense 10 point touch recognition allows up to 5 users to simultaneously perform pen and mouse functions, erase ink and manipulate and move objects on the interactive whiteboard surface. The system recognizes individual multitouch gestures for each user, whether by finger, stylus or any other object of choice.






model type	i3TOUCH V7002 T10
	70"
Display Ratio	16:09
optimum resolution	1920*1080 RGB
brightness	350cd/m2
contrast ratio	5000:1
response time	4ms
input port	TV * 1
	VGA * 3
	PC AUDIO * 3
	TOUCH USB * 3
	HDMI * 5
	YPbPr * 2
	CVBS * 2
	S-Video * 1
	TV USB * 2
output port	VGA * 1
	PC AUDIO * 1
	Coaxial * 1
	CVBS * 1
	Earphone * 1
commnication port	RS232 * 1
audio power	2*12W
power supply	standby power≤0.5W
	complete power consumption≤150W

anti-collision tempered glass	Yes
Bazel	1656*1021*113MM
Screen area	1538.9 * 865.7MM
Outside dimensions	1656*1021*132MM
Package	1750*1277*300MM
Net weight	85kg
Total weight	92kg
Touch technology	V-Sense
Touch modus	finger and pen
Touch points	10 simultaneous touches (only in Windows 7 or later)
tempered glass	6mm
Resolution	8096*8096
Response speed	4ms

TECHNICAL DRAWING

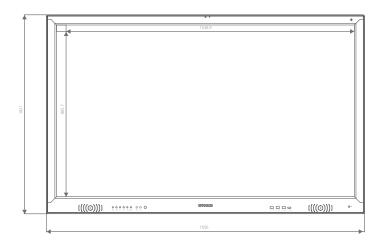

AUTHORISED DISTRIBUTOR

