



i3PROJECTOR L3502W

LASER TECHNOLOGY

i3PROJECTOR L3502W is an ultra short-throw projector without lamp! The next generation projector offers numerous performance capabilities and lowers the total cost of ownership dramatically. i3PROJECTOR WLTM is a widescreen lamp-less projector.

Offering a brightness of 3500 lm and a light source lifetime of 20.000 hours, this projector is the ideal projection solution for classrooms and meeting rooms.

INTERACTIVE

- The perfect combination with an i3Board

INSPIRING

- Laser technology
- Lamp life 20.000hrs
- Ultra short-throw projector
- Instant On / Off (5sec)
- Green design: Mercury free
- Wide color range

INTEGRATED



- 3500 Lumen
- WXGA 1280x800
- Aspect ratio 16:10
- Speaker 10W
- DLP Technology

WARRANTY

- 3 years on the projector
- 3 years (max. 10.000 hours) on the light source *


*extendable to 5 years



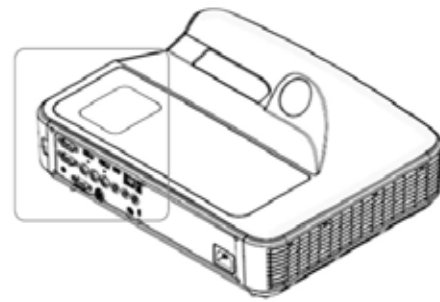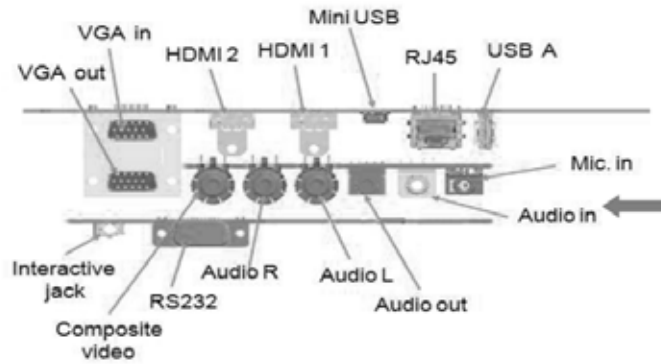

SPECIFICATIONS

Laser light source LASER with 20,000hrs lifetime		VGA audio input	Qty : 1 / 3.5mm phone jack (blue) / stereo (dedicated to selected VGA input port)
Brightness	3500 lumens	Composite audio input Qty	2 / RCA-Left (white) / RCA-Right (red) / stereo
Contrast	1,800:1 (native) / 10,000:1 (APM)	Microphone input Qty	1 / 3.5mm phone jack (pink) / mono
Resolution (native)	1280 x 800	System audio output Qty	1 / 3.5mm phone jack (green) / stereo
Aspect ratio (native)	16 : 10	RS232	Qty : 1 / DB-9 female / 9600bps Purpose : projector control
Throw ratio	0.27	Mini USB	Qty : 1 / device mode Purpose : for firmware upgrade (USB1.0) / interactive (USB2.0)
Focus range	85" - 115"	RJ45	Qty : 1 / Fast Ethernet (100Base-T) Purpose : remotely projector control (Crestron / AMX / PJ-Link) Others : video streaming
Temperature/ Humidity	Operating : 5°C ~ 40°C / 5%~90% without condensation Storage : 0°C ~60°C / 5%~95% without condensation Shipping :- 20°C ~ 60°C / 5%~95% without condensation	USB A	Qty : 1 / host mode / USB2.0 (for local playback or Wi-Fi dongle)
Temperature / Altitude	Operation 5°C~40°C @ 0~2,500 feet 5°C~35°C @ 5°C~30°C @ 5,000~10,000 feet	Speaker	1 x 10W
Thermal Protection	Auto shutdown : Ambient temperature exceeds 47±2°C Auto ECO : Ambient temperature exceeds 40°C	Power consumption	291W (Full mode), 198W (Eco mode)
Noise level	Full mode : 36dBA (typical) / 38dBA (maximum) ECO mode : 32dBA (typical) / 35dBA (maximum)	Standby power	(1) Idle without LAN wakeup : < 0.5W (2) Idle with LAN wakeup : < 8W
HDMI input	Qty : 2 (HDMI1 with MHL2.0 support) HDMI : 1.3a HDCP : 1.3 Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Dimensions	Width x Depth x Height = 383mm x 308mm x 86mm
VGA input	Qty : 2 (1 sharing with VGA output by OSD setup) Video Standard: 480i/480p/576i/576p/720p/1080i/1080p PC Graphics: up to UXGA (1600x1200@60Hz)	Weight Net	5.5kg (12.1lb)
Composite input	Qty : 1 / RCA (yellow) Video Standard : 480i/576i	EMC	CE, FCC, CCC
VGA output	Qty : 1 (Sharing with one of VGA input by OSD setup) Loop through VGA input	Safety	TUV, UL, CCC
		Green	RoHS, WEEE, REACH
		Cable	AC power cord 3m x1 VGA cable 1.8m x1
		Remote control	
		User Manual	CD x1
		Quick Start Guide	QSG x1

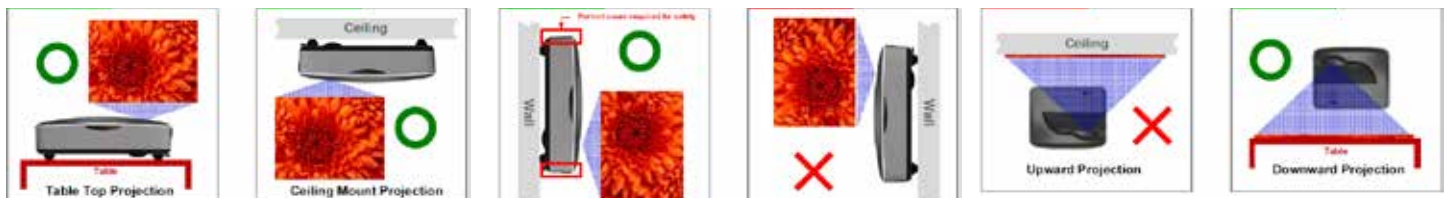

AUTHORISED DISTRIBUTOR